


- Available in incremental lengths
- Spooled or on reels
- For 220-240 VAC
- Full range of controls and accessories
- Durable construction

Easy Heat EasyCable: a multipurpose heating cable, suitable in floor warming, frost protection, roof and gutter de-icing applications. Easy Heat EasyCable should not be cut-to-length; it is ready to install. Simply connect the pre-fixed cold lead. Easy to install. Instructions for individual applications available.

Technical data

Wire type	: fixed resistance wire
Heating cable	: dual conductor, braided
Power supply	: 220 – 240 VAC
Output	: nominal 15 W/m at 230 VAC
Cable rated temperature	: 70 °C
Bend radius	: minimum 30 mm
Weight	: average 60 g/m
Heating cable approval	: IEC 60800, CE marked
Cold lead	: 3 x 0,75 mm ² (<6 A) or 3 x 1,0 mm ² (>6 A); 2 m length

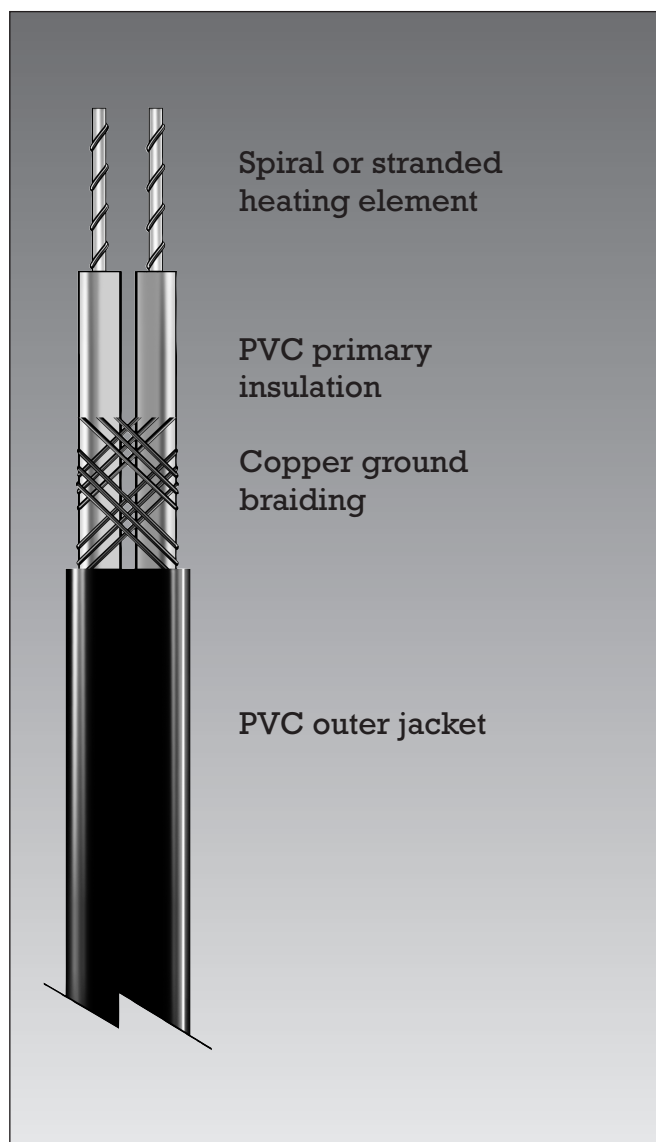

Size range and product specification

Model	Length (m)	Power (W) at 230 VAC	Amperage (A) at 230 VAC	Resistance Ω at 20°C
EasyCable-9	9,5	130	0,6	397
EasyCable-14	15	220	1,0	240
EasyCable-18	18	280	1,2	192
EasyCable-29	29	420	1,8	125
EasyCable-37	37	550	2,4	96
EasyCable-49	49	730	3,2	72
EasyCable-61	61	900	4,0	58
EasyCable-73	73	1100	4,8	48
EasyCable-85	85	1300	5,6	41
EasyCable-100	100	1500	6,5	36
EasyCable-113	113	1700	7,3	31
EasyCable-135	136	2000	8,9	26
EasyCable-146	146	2200	9,4	24

All specifications are subject to production tolerances and design changes

Cables and controls must be installed in accordance with local electrical norms and regulations of the respective country.



<http://www.easyheat.com>

<http://www.easyheat.nl>

U.S.A.:

Easy Heat
31977 US 20 East
NEW CARLISLE, IN 46552
Tel +1 574 654 3144
Fax +1 574 654 7739

CANADA:

Easy Heat Ltd
440 Phillip St.
WATERLOO, Ont. N2L 5R9
Tel +1 519 885 2850
Fax +1 519 885 5460

THE NETHERLANDS:

Nelson Easy Heat Europe
Sluisweg 19a
5145 PE Waalwijk
Tel +31 (0)416 543 301
Fax +31 (0)416 543 339